

The Atlona AT-UHD-M2C-BAL is an audio converter used to extract and downmix multi-channel digital Dolby® and DTS® surround sound signals from HDMI sources to balanced analog signals for professional audio systems. The converter provides controls for one- or two-channel mode, volume, mute, bass, and treble via RS-232, TCP/IP, and a web-based GUI. A balanced analog audio output is provided on a 5-pin captive screw connector. The video pass-through design of the AT-UHD-M2C-BAL allows it to be placed anywhere in the signal path where a convenient audio feed to the sound system is required.

In commercial applications where audio is provided by an HDMI source, integrators need an easy solution to extract balanced, +4 dBu, two-channel or monaural audio for professional sound reinforcement systems while maintaining full 4K/UHD video signal integrity for video switching and distribution systems. Integrated control reduces total cost in simple systems potentially eliminating a DSP or other volume control device.

The AT-UHD-M2C-BAL is ideal for use in training or meeting spaces that require audio from PCs or Blu-ray players to be routed to a distributed speaker system. The converter is placed in line between the source and the HDBaseT transmitter or switcher in order to provide a feed to both the sound and video systems.

#### Universal de-embedder for Dolby and DTS signals -

- Supports PCM, LPCM, Dolby Digital, Dolby Digital Plus, Dolby TrueHD, DTS Digital Surround®, and DTS-HD Master Audio®
- Allows any multi-channel audio stream to be used within a professional audio system

#### Downmixes multi-channel audio to 1 or 2-channel audio -

- Extracts, decodes, downmixes and converts digital multi-channel streams to analog two-channel or summed mono signals
- Provides easy integration of HDMI audio sources into professional audio systems

#### Balanced audio output -

- Professional, +4 dBu audio is provided on a 5-pin captive screw connector
- Allows for fast and proper integration with professional sound systems

#### Volume and EQ adjustment -

- On-board adjustment of output volume, bass, and treble settings via RS-232 and web-based GUI
- Audio adjustment without external DSP

#### 4K/UHD support -

- Supports all HDMI resolutions up to 4K/UHD including 4K @ 30 Hz, 4:2:2
- Ensures all high-resolution signals are passed to video system

#### Control capabilities -

- RS-232, TCP/IP, and web-based GUI provide external control of volume, mute, bass, and treble
- Easy interface to control systems for simplified audio system adjustments

#### Default switch -

- Allows volume, mute, EQ, and 2- /1-ch. settings to be externally controlled (Adjust) or reset to factory settings (Default)
- Provides quick troubleshooting adjustment when control systems are not available

## Specifications

### Video Resolutions

Video	4096x2160@24/25/30Hz, 3840x2160@24/25/30Hz, 2048x1080p, 1080p@23.98/24/25/29.97/30Hz, 1080i@50/59.94/60Hz, 720p@50/59.94/60Hz, 576p, 576i, 480p, 480i
VESA	2560x2048, 2560x1600, 2048x1536, 1920x1200, 1680x1050, 1600x1200, 1440x900, 1400x1050, 1366x768, 1360x768, 1280x1024, 1280x800, 800x600, 640x480
Colorspace	YUV, RGB
Chroma Subsampling	4:4:4, 4:2:2
Color depth	8-bit, 10-bit, 12-bit

### Audio

Formats - HDMI IN/OUT	PCM 2Ch, LPCM 5.1, LPCM 7.1, Dolby Digital, DTS 5.1, Dolby Digital Plus, Dolby TrueHD, DTS-HD Master Audio
Format - Captive screw analog	Balanced +4 dBu, 2Ch
Sample Rate	32kHz, 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz, 192 kHz
Total Harmonic Distortion	0.0008% (dB, sample frequency: 48kHz)
Signal/Noise Ratio	142dB
Frequency Range	20Hz to 20kHz $\pm$ .1dB
Crosstalk	<-103dB
Bass	15dB to -15dB @ 500Hz
Treble	15dB to -15dB @ 2kHz

### Distance (per port)

HDMI @ 1080p	10 meters	30 feet
HDMI @ 4K	5 meters	15 feet

### Signal

Bandwidth	10.2 Gbps
CEC	Pass through
HDCP	Switchable - Compliant / Non compliant

### Temperature

Operating	0°C to 50°C	32°F to 122°F
Storage	-20°C to 60°C	-4°F to 140°F
Humidity	20 to 90% non-condensing	

### Power

Consumption	7W
Supply	Input: AC 100-240V ~ 50/60Hz Output: DC 5V / 2.6A

### Dimension


H x W x D	30 x 125 x 110 (mm)	1.18 x 4.92 x 4.33 (inch)
-----------	---------------------	---------------------------

### Weight

Device	0.28 kg	0.61 lbs
--------	---------	----------

### Certification

Power Supply	CE, FCC, cULus, RCM
Product	CE, FCC

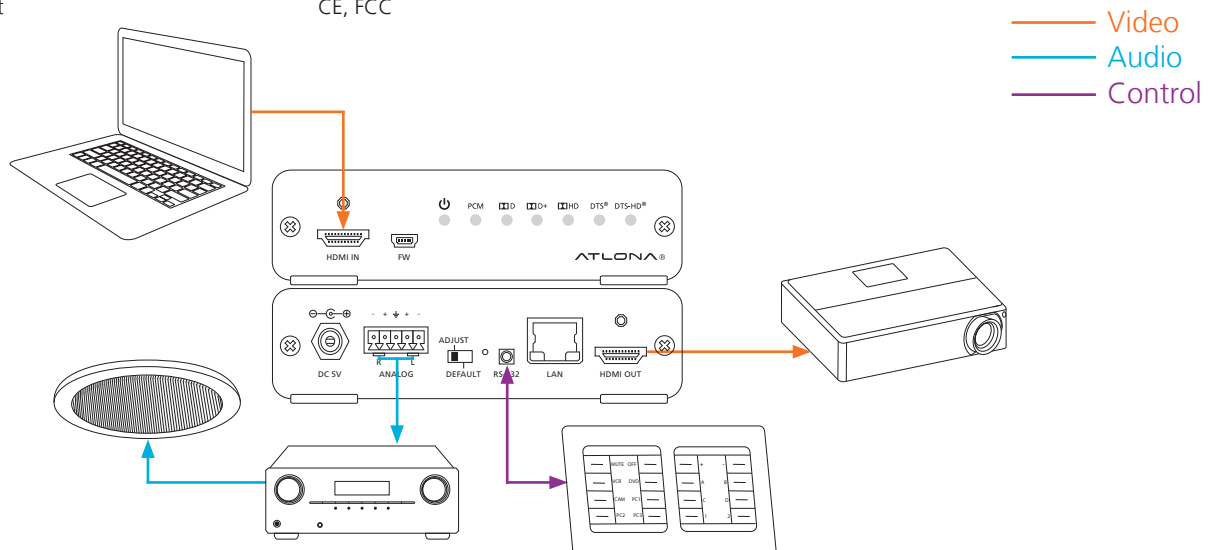

Specifications and availability subject to change without notice. Actual products, product images, and online product images may vary from images shown here. Not responsible for typographical errors.